


GRAPHITE LUBRICANT

# 3R3800

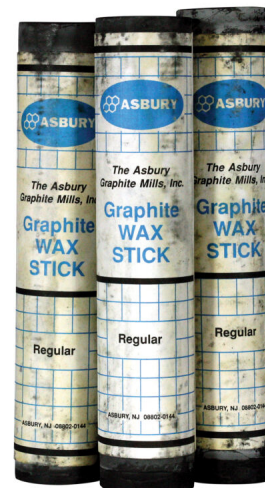

## Description

The graphite wax sticks are specially formulated to coat, lubricate, and reduce friction on various surfaces.

## Applications

The 3R 3800 lubricant, for tough grinding and cutting operations, reduces friction and heat while increasing equipment life. Used for coating of dummy blocks and billet ends in aluminium extrusion operations. Also for mould touch-up, slide gate refractory plates, troughs, etc. It is also ideal as a general-purpose lubricant for operations such as drilling, tapping, pipe cutting, etc. This product does not leave any residue and prevents dust or debris to stick to parts.

## Specifications

### Technical Data

Temperature

121°C (250°F)

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.