



INDUSTRIES 3R

Danville Office

55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0

Phone: 819-839-2793


Fax: 819-839-2797

Toll-free: 800-567-2728

E-mail: info@industries3r.com

OTHERS

3R518

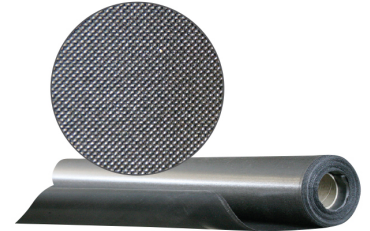

Description

The 3R 518 is a polyester fabric coated with a PVC vinyl. It is resistant to cutting liquids, ultra-violets and oils.

Applications

Commonly used to make protective boots.

Specifications

Technical data sheet

Weight	18 oz/yd ²
Thickness	0.020"
Width	61"
Temperature	-40°C to 65°C (-40°F to 145°F)
Breaking strength	Warp: 2350 N, Weft: 2700 N
Tear strength	Warp: 390 N, Weft: 375 N
Flammability Requirements	NFPA701
Color	Blue, yellow and black

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.