




INDUSTRIES 3R

Danville Office
55, route 116 Ouest
Danville (Québec) Canada
J0A 1A0

Phone: 819-839-2793
Fax: 819-839-2797
Toll-free: 800-567-2728
E-mail: info@industries3r.com

OTHERS

3R528

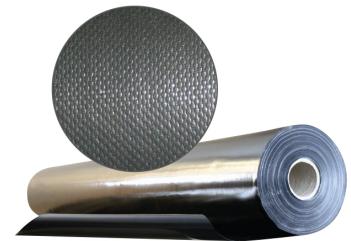

Description

The 3R528 is a polyester fabric coated with a U.V. treatment. It is resistant to cutting liquids and outdoor conditions. It is also mildew resistant and easy to clean.

Applications

This fabric is commonly used to make protective boots.

Specifications

Technical Data

Temperature	-40°C to 65°C (-40°F to 145°F)
Weight	28 oz/yd ²
Thickness	0.033"
Tensile strength	Warp: 766lbs, Weft: 723 lbs
Adhesion (ASTM D751(Bond)	11 lbs/inch
Tear strength (ASTM D751)	Warp: 183 lbs (+/- 10%), Weft: 158 lbs (+/-10%)

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.